



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


14 GPM: D14WL2NAF - NSF/ANSI 61 & 372 Certified Product Specifications

Call 800-523-8499 to order the Dosatron for your specific application

Dilution Range:	1:500 to 1:50 (0.2% to 2%)
Water Flow Range:	0.05 to 14 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	Polypropylene
Dimensions:	19 1/18" x 6 5/16"
Weight:	6 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and quick start guide



Bypass Installation

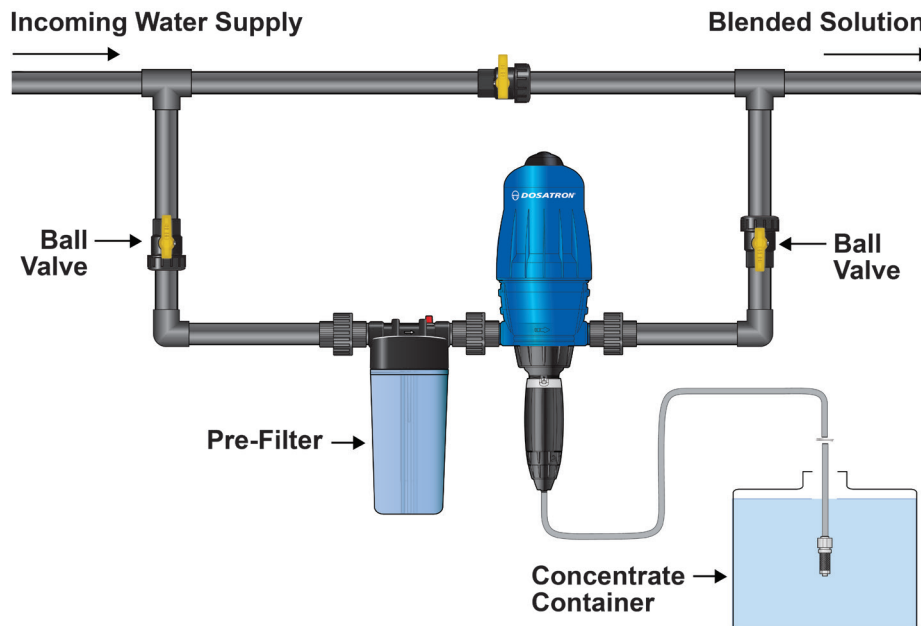

Certified to NSF/ANSI 61 & 372



**Dosatron International • 2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com**

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.